

# Powerful performance – high stability.

## Bosch Solar Module c-Si M 60

### EU30117

**High-quality – high-performance – reliable.**  
Solar modules from Bosch Solar Energy.



**BOSCH**



#### **Our crystalline solar modules offer impressive features including:**

- ▶ Excellent quality assured through use of the best European-standard components
- ▶ Excellent processing and long-term stability right along the value-added chain
- ▶ Higher specific yields due to positive power sorting
- ▶ Professional customer service with unbureaucratic order and complaint processing carried out by designated contact persons
- ▶ Simple and secure installation with dovetailed Bosch Solar Rack products

#### **Warranty conditions:**

- ▶ 10 years product warranty
- ▶ 25-year performance guarantee (90% up to 10 years, 80% up to 25 years)
- ▶ Product certification to IEC 61215 (ed. 2)
- ▶ Protection class II / IEC 61730
- ▶ CE conformity



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Salt corrosion resistance tested
- Periodic inspection



Manufacturer	Length [x]	Width [y]	Height [z]	Weight	Junction box	Plug connector type	Cable [l]	Front glass surface
17	1660.0	990.0	50.0	21	Spelsberg	MC4	Minus 800 Plus 1200	Structured

x, y, z, l in mm, ±2 mm; weight in kg ±0.5

Crystalline solar module	
<b>Performance classes</b>	<b>225 Wp, 230 Wp, 235 Wp, 240 Wp, 245 Wp</b>
<b>Performance sorting</b>	-0/+4.99 Wp
<b>Structure</b>	<b>Glass-foil laminate</b> ▶ Anodized aluminum frame ▶ Junction box (IP 65) with 3 bypass diodes ▶ Weather-resistant back sheet (white)
<b>Cells</b>	<b>60x monocrystalline solar cells</b> in 156 mm x 156 mm format
<b>Mechanical load</b>	<b>5400 Pa superimposed load, 2400 Pa suction load,</b> in accordance with IEC 61215 (extended test)

**Electrical characteristics for STC\*:**

Designation	P <sub>mpp</sub> [Wp]	V <sub>mpp</sub> [V]	I <sub>mpp</sub> [A]	V <sub>oc</sub> [V]	I <sub>sc</sub> [A]	Reverse-current load capacity [A]
M245 3BB	245	30.10	8.20	37.70	8.70	17
M240 3BB	240	30.00	8.10	37.40	8.60	17
M235 3BB	235	29.90	8.00	37.10	8.50	17
M230 3BB	230	29.70	7.90	37.00	8.40	17
M225 3BB	225	29.40	7.80	36.90	8.30	17


Reduction in module efficiency with decrease in irradiation level from 1000 W/m<sup>2</sup> to 200 W/m<sup>2</sup> (at 25 °C):  
-0.33% (absolute); measuring tolerance P ±3%

**Electrical characteristics for NOCT\*:**

Designation	P <sub>mpp</sub> [W]	V <sub>mpp</sub> [V]	V <sub>oc</sub> [V]	I <sub>sc</sub> [A]
M245 3BB	177	27.07	34.09	6.92
M240 3BB	173	26.98	34.00	6.84
M235 3BB	169	26.87	33.89	6.76
M230 3BB	166	26.76	33.79	6.68
M225 3BB	162	26.55	33.49	6.60

NOCT: Normal Operation Cell Temperature 48.4 °C; Irradiation level 800 W/m<sup>2</sup>, AM 1.5, temperature 20 °C, wind speed 1 m/s, electrical open circuit operation

**Dimensions\*\*:**

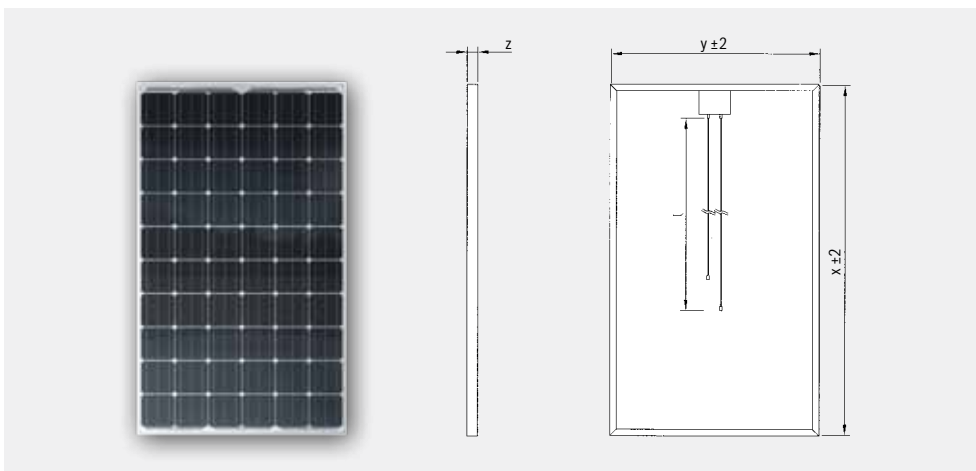

\* Electrical parameters are typical mean values from historical production data. Bosch Solar Energy AG assumes no liability for the accuracy of this data for future production batches.

\*\* Drawings are not to scale. For detailed dimensions and tolerances, see above.

**Notes on assembly:**

- ▶ See installation and operating manual at: [www.bosch-solarenergy.com/products/](http://www.bosch-solarenergy.com/products/)
- ▶ Horizontal and vertical assembly possible
- ▶ System voltage max. 1 000 V

**Weak light performance:**

Intensity [W/m <sup>2</sup> ]	V <sub>mpp</sub> [%]	I <sub>mpp</sub> [%]
800	0.0	-20
600	0.0	-40
400	-0.4	-60
200	-3.2	-80
100	-6.0	-90

The electrical data applies for 25 °C and AM 1.5.

**Thermal characteristics:**

Operating temperature range	-40 to 85 °C
Temperature coefficient P <sub>mpp</sub>	-0.46%/K
Temperature coefficient V <sub>oc</sub>	-0.32%/K
Temperature coefficient I <sub>sc</sub>	0.032%/K

**Bosch Solar Energy AG**  
 Wilhelm-Wolff-Straße 23  
 99099 Erfurt  
 Germany  
 Phone: +49 361 2195-0  
 Fax: +49 361 2195-1133  
[sales.se@de.bosch.com](mailto:sales.se@de.bosch.com)  
[www.bosch-solarenergy.com](http://www.bosch-solarenergy.com)